

**174-230 MHz**

*Hi VHF Band III*

**Band III Panel Antenna**



Double dipole panel composed of all weld steel, hot dipped galvanized for weather protection. The panel is broadband and can be used for single channel operation, or multiple channel operation in the 174 – 230 MHz spectrum.


The rugged mechanical design and internal feed conductors allow this antenna to operate reliably under extreme icing conditions. Each panel can easily handle 3kW of input power, and multiple bays can be stacked horizontally or vertically to satisfy required gain or coverage.

**174-230 MHz**


*Hi VHF Band III*



***Electrical***

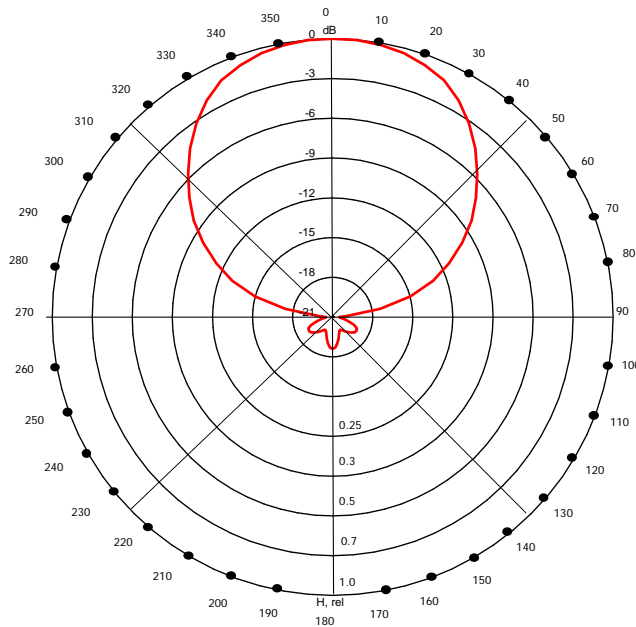

H pol - Horizontal Radiation Pattern (E-Plane)

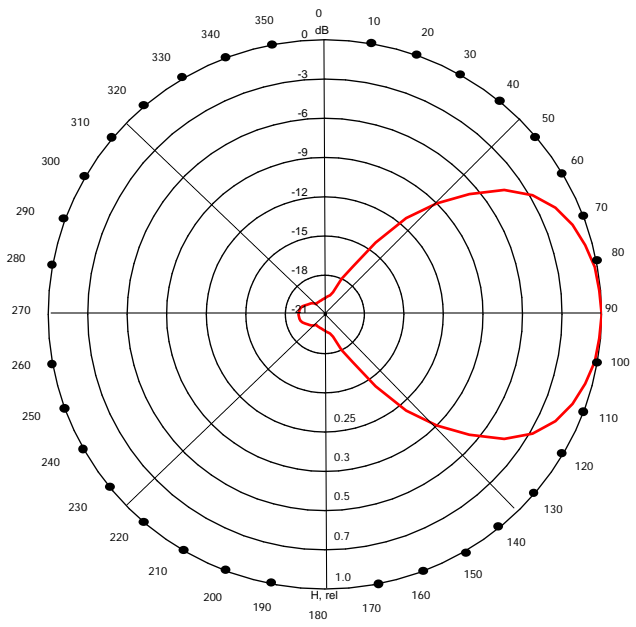

H pol - Vertical Radiation Pattern (H-Plane)

Frequency Range:	174-230 MHz
Input connector:	N female or 7-16 female
VSWR:	< 1.15
Gain:	8.0 dBd
Polarization:	Horizontal or Vertical
Impedance:	50 $\Omega$
Max. input power:	3 kW
-3dB HPBW (E-Plane):	69 degrees
-3dB HPBW (H-Plane):	64 degrees


**174-230 MHz**

*Hi VHF Band III*



## Mechanical

- Exterior material: Hot-dip galvanized steel
- Interior material: Machined brass and stainless steel
- Dimensions: 1150 mm X 1150 mm rear panel grid
- Grounding: Antenna and radiating elements are DC grounded for lightning protection
- Mounting clamps: HDG clamps are included for attachment to customer supplied mast of any OD. Please specify when ordering
- Icing protection: Antenna design and feed point radome ensure reliable operation under extreme icing
- Shipping: The antenna is shipped disassembled

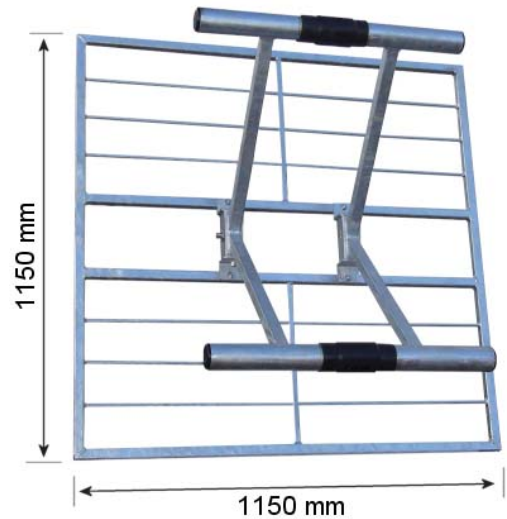

# of Bays	Panels per Bay	Total # of Panels	Gain (dBd)	Gain (Pr)	Weight (Kg)	Overall Height (meters)	Windload kN @ 160 km/h
1	1	1	8.0	6.31	28	1.2	0.77
	2	2	5.9	3.89	56		1.4
	3	3	4.5	2.82	84		1.9
	4	4	3.0	1.99	112		2.5
2	1	2	11.0	12.59	56	2.8	1.4
	2	4	8.8	7.59	112		2.5
	3	6	7.4	5.50	168		3.9
	4	8	5.9	3.89	224		5.0
3	1	3	12.8	19.05	84	3.4	1.9
	2	6	10.6	11.48	168		3.9
	3	9	9.2	8.32	252		5.7
	4	12	7.7	5.89	336		7.8
4	1	4	13.9	24.55	112	6.0	2.5
	2	8	11.7	14.79	224		5.0
	3	12	10.3	10.72	336		7.8
	4	16	9.8	9.55	448		10.2
6	1	6	15.7	37.15	168	9.2	3.9
	2	12	13.3	21.38	336		7.8
	3	18	12.0	15.85	504		11.6
	4	24	10.5	11.22	672		15.5
8	1	8	16.9	48.98	224	12.4	5.0
	2	16	14.6	28.84	448		10.2
	3	24	13.2	20.89	672		15.5
	4	32	11.7	14.79	896		20.5